

## Product Datasheet - Technical Specifications



More information in our Web-Shop at ► [www.meilhaus.com](http://www.meilhaus.com)

### Your contact

Technical and commercial sales, price information,  
quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

**Meilhaus Electronic GmbH**  
Am Sonnenlicht 2  
82239 Alling/Germany

Tel. +49 - (0)81 41 - 52 71-0 E-  
Mail [sales@meilhaus.com](mailto:sales@meilhaus.com)

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

## HM-TD2C68E-25/Q Thermographic Network Box Camera



The Thermographic Network Box Camera with small size, low power consumption and simple integration realizes real-time high-accuracy object temperature measurement.

- High sensitivity sensor with 640 x 512 resolution
- Object temperature range: -20°C to 150°C (-4°F to 302°F),Max ( $\pm 1$  °C,  $\pm 1\%$ ); 0 °C to 650 °C (32°F to 1202 °F);,Max ( $\pm 2$  °C,  $\pm 2\%$ )
- Temperature measurement at user-defined points, lines, and areas
- Thermal image frame rate: 50 fps
- A highlighted cross at the max. temperature in the thermal image
- Color alarm (isotherm) available for Above, Between, and Below object temperatures
- Support mirroring, digital zoom(2x,4x,8x)

## Specification

Field of View	15cm: 17.5°(H) x 14°(V) x 22.3°(D)
	4.3cm: 17.9°(H) x 14.3°(V) x 23.0°(D)

### Thermal Module

Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
Resolution	640 x 512
Pixel Pitch	12 μm
NETD	≤ 35 mK (@25° C, F# = 1)
Focal Length	25 mm
Focus Mode	Athermalized
IFOV	0.48 mrad
Aperture	F 1.0
Min. Focusing Distance	0.15 m

### Measurement and Analysis

Object Temperature Range	Range -20°C~150°C Range 0°C~650 °C
Temperature Accuracy	Range -20~150°C: -20~100°C:±1°C 100~150°C:±1% Range 0~650°C 0~100°C:±2°C 100~650°C:±2%
Measurement Presets	Hot spot, cold spot in real time
Point	10 User Presets
Line	1 User Presets
Area	10 User Presets
Color Alarm (Isotherm)	Above/Between/Below

### Thermographic Integration

Temperature Metadata	Continuous output data of preset thermographic rules and measured temperature
Thermographic Data Encoding	4 fps, 32-bit 640 × 512 per frame


Thermographic Data Upload	Real-time full-screen thermographic data matrix (16-bit or 32-bit 640 × 512) via RTSP, ISAPI, and SDK
Raw Data Upload	Real-time full-screen YUV data via RTSP and SDK
<b>Video and Image</b>	
Main Stream	50 fps (640 × 512)
Video Compression	H.265/H.264/MJPEG
Color Palettes	15 options: White Hot, Black Hot, Fusion 1, Rainbow, Fusion 2, Ironbow 1, Ironbow 2, Speia, Color 1, Color 2, Ice Fire, Rain, Red Hot, Green Hot, Dark Blue
Digital Zoom	2×, 4×, 8×
<b>Network</b>	
Protocols	IPv4/IPv6,HTTP,HTTPS,802.1x,Qos,FTP,SMTP,UPnP,SNMP,DNS,DDNS,NTP,RTSP,RTCP,RTP,TCP,UDP,IGMP,ICMP,DHCP,PPPoE,Bonjour,SFTP,SRTP
Network Storage	NAS (NFS, SMB/CIFS),
API	MODBUS, ISAPI, Network SDK, Open Network Video Interface (Profile S, Profile G)
Simultaneous Live View	Up to 20 channels
User/Host level	Up to 32 users, 3 levels: Administrator, Operator, User
Security	User authentication (ID and PW), MAC address Binding, HTTPS Encryption, IEEE 802.1x(EAP-MD5, EAP-TLS), Access Control, IP Address Filtering, Illegal Login, HDD Full, HDD Error, Network Disconnected
Client	HIKMICRO Analyzer
<b>Interface</b>	
Alarm Input	1, alarm input (0-3.3 VDC)
Alarm Output	1, alarm output; NC, level quantity
Alarm Action	Preset/patrol scan/alarm record/relay output/smart capture/FTP upload/email linkage
Communication Interface	1, RJ45 10 M/100 M/1000 M self-adaptive Ethernet interface 1, RS-485 interface (ModBus available)
Analog Output	1, CVBS output
<b>General</b>	
Menu Language	English
Power Supply	10-30 VDC
Power Consumption	3W Max

Working Temperature/ Humidity	-20 °C to 50 °C (-4 °F to 122 °F) 90% or less
Protection Level	IP40
Dimensions	138.4 mm × 79 mm × 80 mm ( 5.44" x 3.11" x 3.15")
Mount	M3
Material	Aluminum alloy
Weight	Approx. 1000g (2.2 lb.)

### ▪ Available Model

HM-TD2C68E-25/Q

### ▪ Dimension

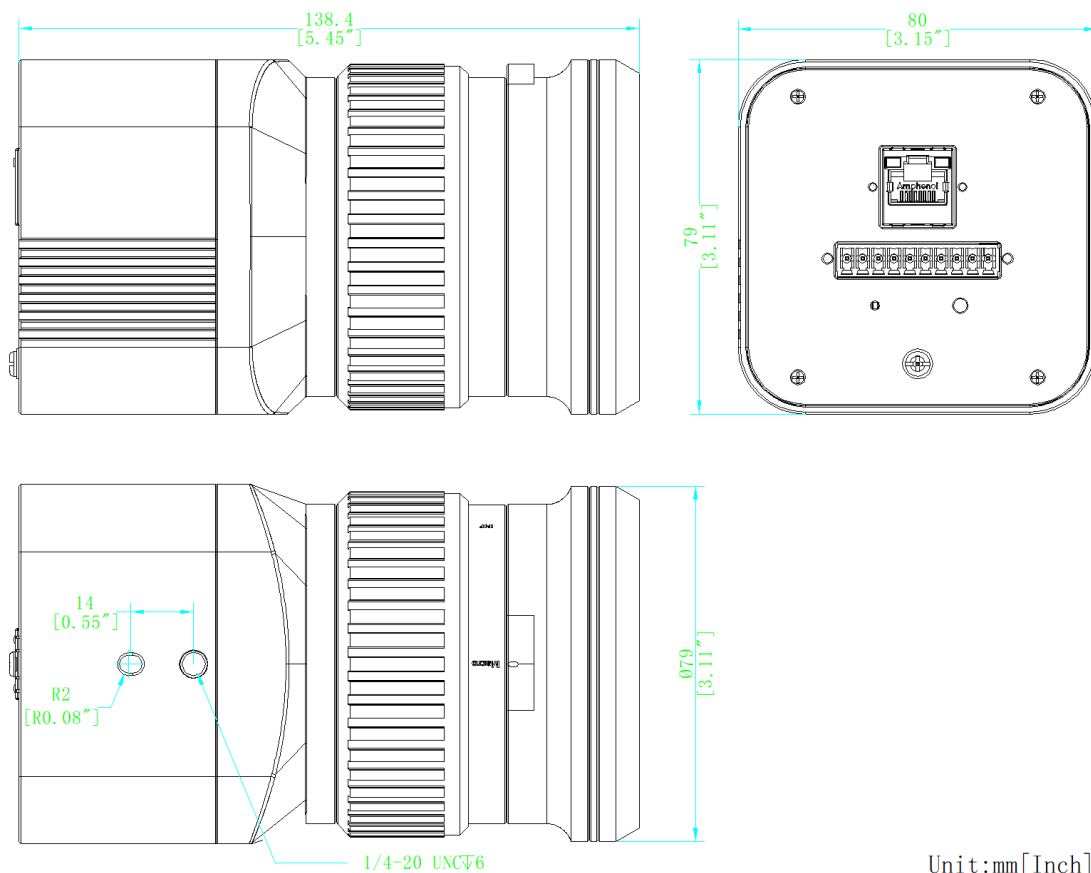

Unit:mm [Inch]

- Accessory
- Optional

HM-AFBR07  
Bracket for R&D Box  
Camera



COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.