

Product Datasheet - Technical Specifications



More information in our Web-Shop at ► www.meilhaus.com

Your contact

Technical and commercial sales, price information,
quotations, demo/test equipment, consulting:

Tel.: +49 - (0)81 41 - 52 71-0

E-Mail: sales@meilhaus.com

Meilhaus Electronic GmbH
Am Sonnenlicht 2
82239 Alling/Germany

Tel. +49 - (0)81 41 - 52 71-0 E-
Mail sales@meilhaus.com

Mentioned company and product names may be registered trademarks of the respective companies. Errors and omissions excepted. © Meilhaus Electronic.

SHN900A Series Vector Network Analyzer



Data Sheet
EN01A



SIGLENT TECHNOLOGIES CO.,LTD

SHN900A

General Description

The SIGLENT SHN900A series of Vector Network Analyzers have a frequency range of 30 kHz to 26.5 GHz, which support 2-port scattering parameter, differential-parameter, and time-domain parameter measurements. The SHN900A series of VNAs are effective instrumentation for determining the Q-factor, bandwidth, and insertion loss of a filter. They feature impedance conversion, movement of measurement plane, limit testing, ripple test, fixture simulation, and adapter removal/insertion adjustments. The VNAs have five sweep types: Linear-Frequency mode, Log-Frequency mode, Power-Sweep mode, CW-Time mode, and Segment-Sweep mode. The SHN900A series VNAs also support scattering-parameter correction of SOLT, SOLR, TRL, Response, and Enhanced Response for increased flexibility in R&D and manufacturing applications.

Key Features


- Frequency range: 30 kHz - 26.5 GHz
- Frequency resolution: 1 Hz
- Level resolution: 0.01 dB
- Range of IFBW: 10 Hz~3 MHz
- Setting range of output level:
 - 45 dBm ~ +10 dBm
 - Dynamic range: 110 dB(Typ.)
- Types of calibration: Response calibration, Enhanced Response calibration, Full-one port calibration, Full-two port calibration, TRL calibration
- Types of measurement: Scattering-parameter measurement, differential-parameter measurement, receiver measurement, time-domain parameter analysis, limit test, ripple test, impedance conversion, fixture simulation, adapter removal/insertion, spectrum analysis frequency offset, scalar mixer measurement, pulse measurement
- Internal Bias-Tee connections
- Support GPS, Time and Location Information Saving
- Interface: LAN, USB Device, USB Host (USB-GPIB)
- Remote control: SCPI/ Labview/ IVI based on USB-TMC / VXI-11 / Socket /Telnet / WebServer
- 8.4-inch touch screen, Mouse, Keyboard

Models and Key Specifications


Model	SHN914A	SHN920A	SHN926A
Frequency range	30kHz-14GHz	30kHz-20GHz	30kHz-26.5GHz
Ports	2		
Frequency resolution	1 Hz		
Level resolution	0.01 dB		
Range of IFBW	10 Hz~3 MHz		
Setting range of output level	-45 dBm ~ +10 dBm		
Dynamic range	110 dB(Typ.)		
Types of calibration	Response calibration, Enhanced Response calibration, Full-one port calibration, Full-two port calibration, TRL calibration		
Types of measurement	Scattering-parameter measurement, differential-parameter measurement, receiver measurement, time-domain parameter analysis, limit test, ripple test, impedance conversion, fixture simulation, adapter removal/insertion, enhanced time-domain parameter analysis (TDR), spectrum analysis, frequency offset, scalar mixer measurement, pulse measurement		
Bias-Tees	Support		
Interface	LAN, USB Device, USB Host(USB-GPIB)		
Remote control	SCPI/ Labview/ IVI based on USB-TMC/ VXI-11/ Socket/ Telnet/ WebServer		
Display	8.4-inch touch screen		
GPS	Support		

Design Features


Multi-window display:

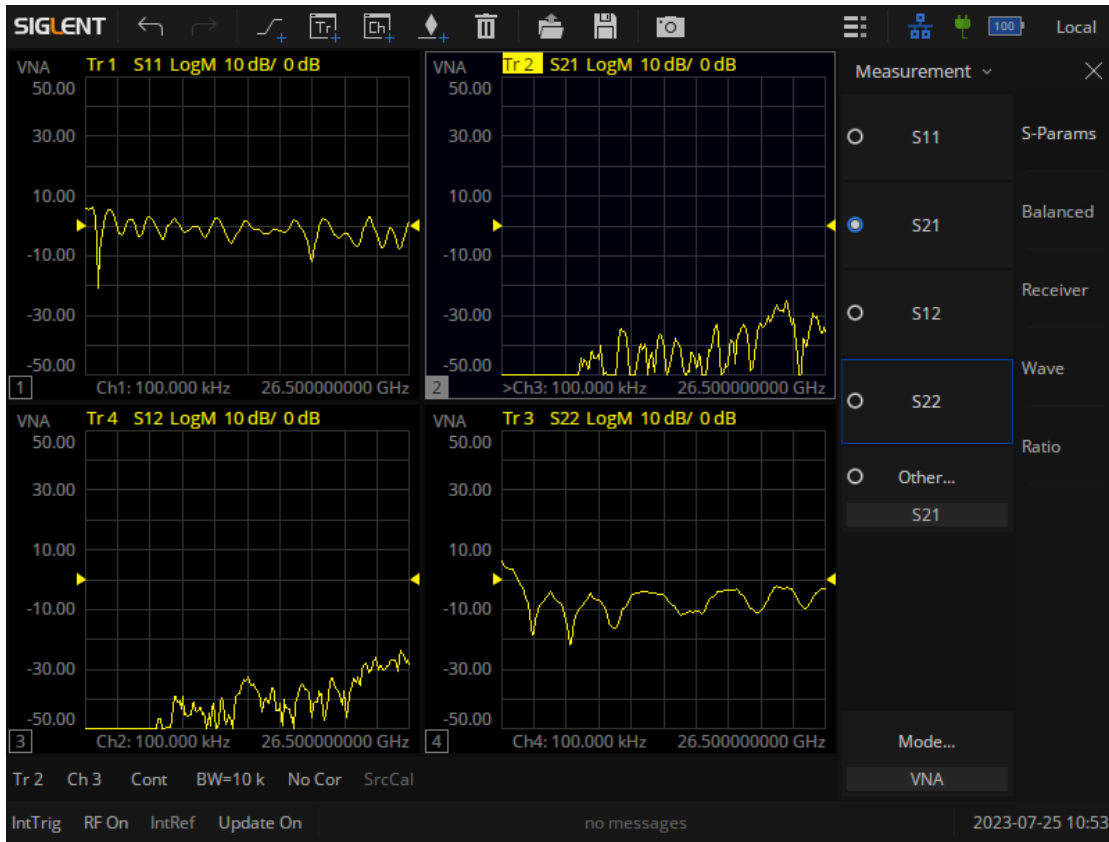


Multi-format display:

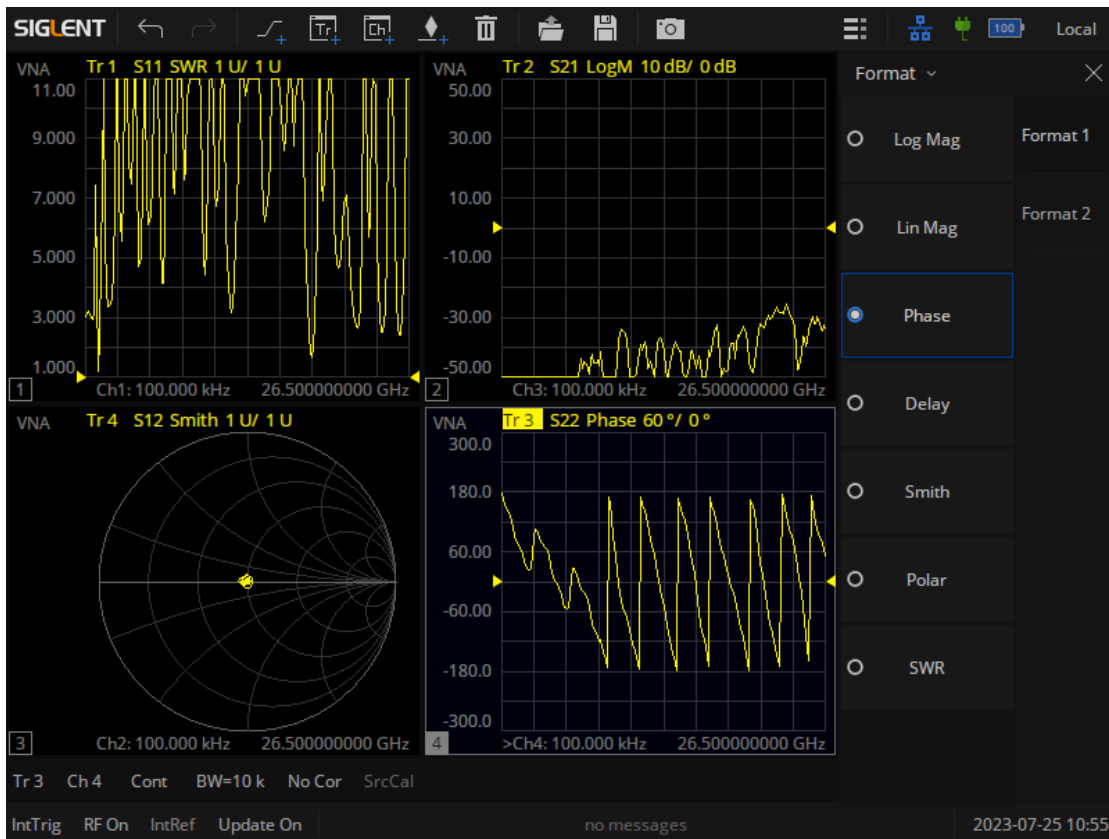


Display and compare memory and current data:

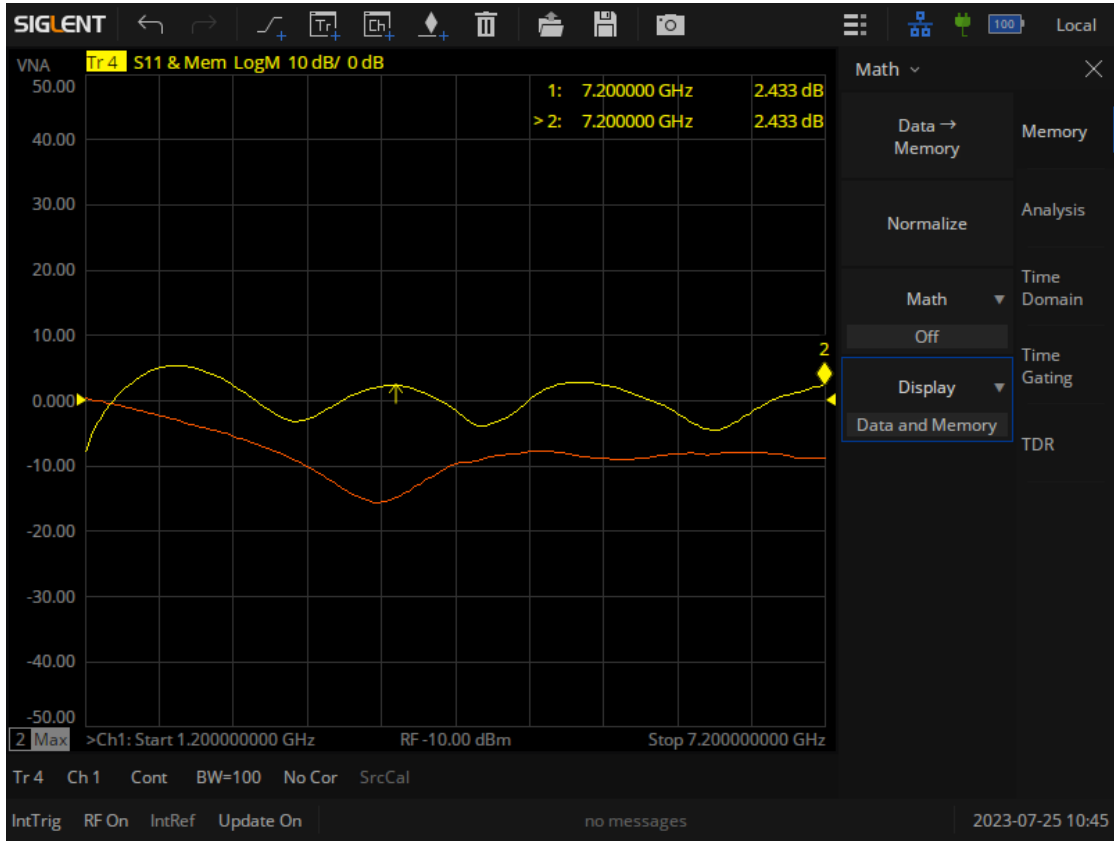


Display data hold:

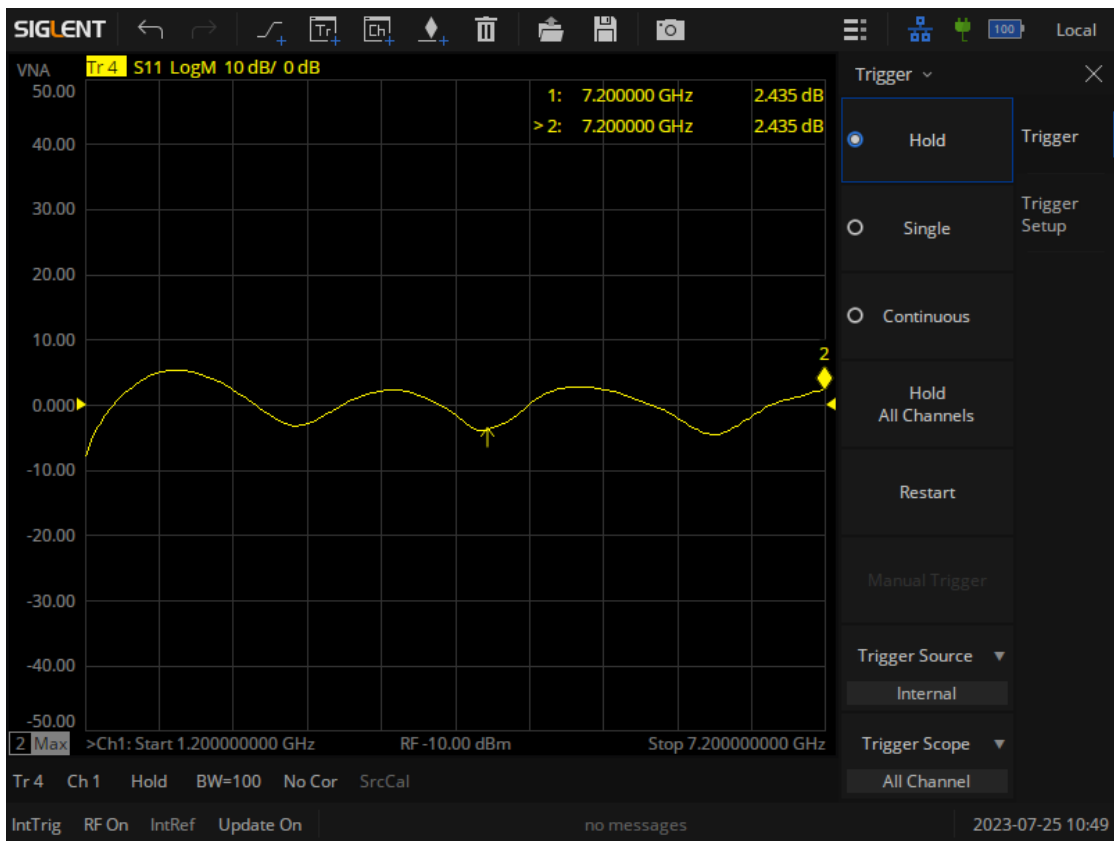


Impedance conversion:

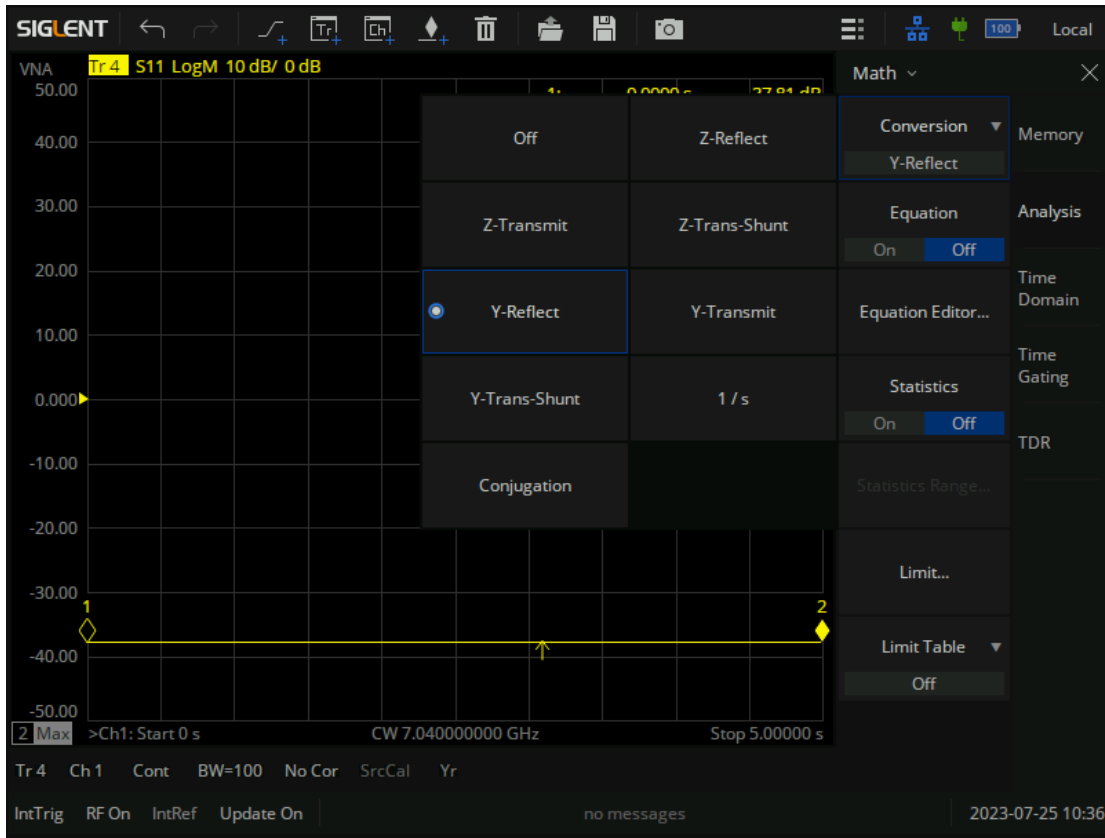


Equation Editor:

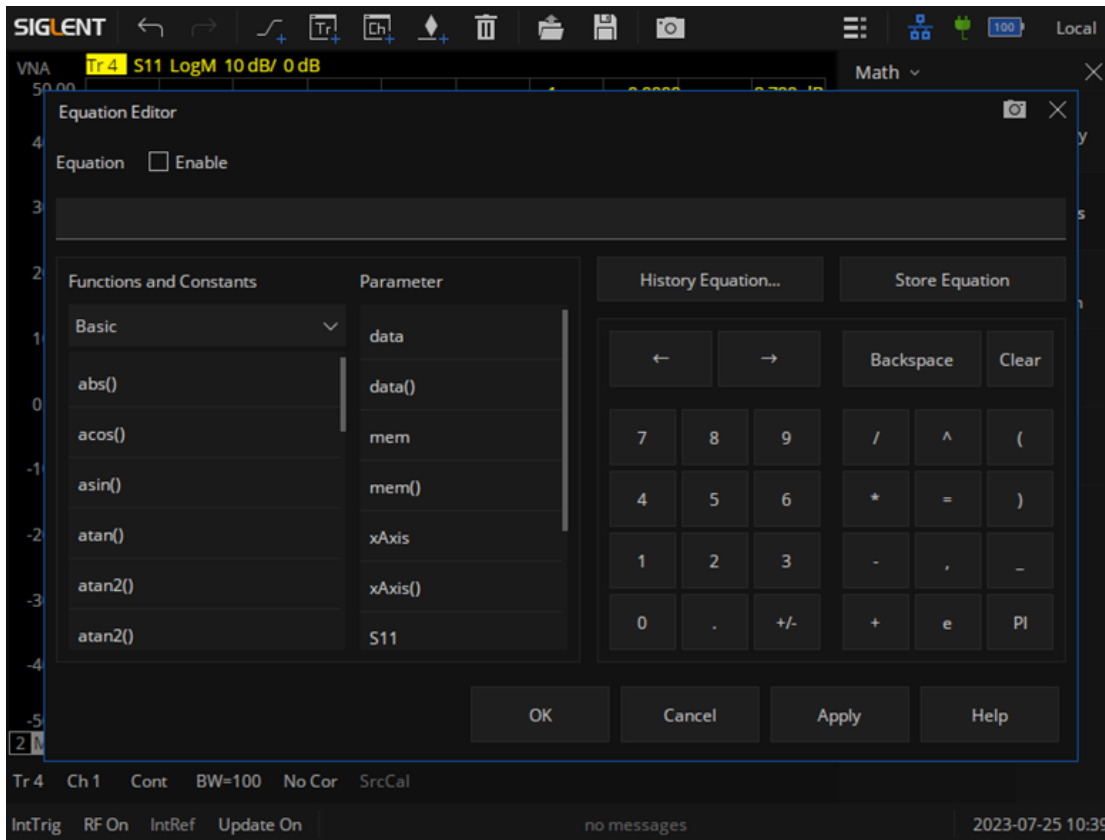


Port Extensions:

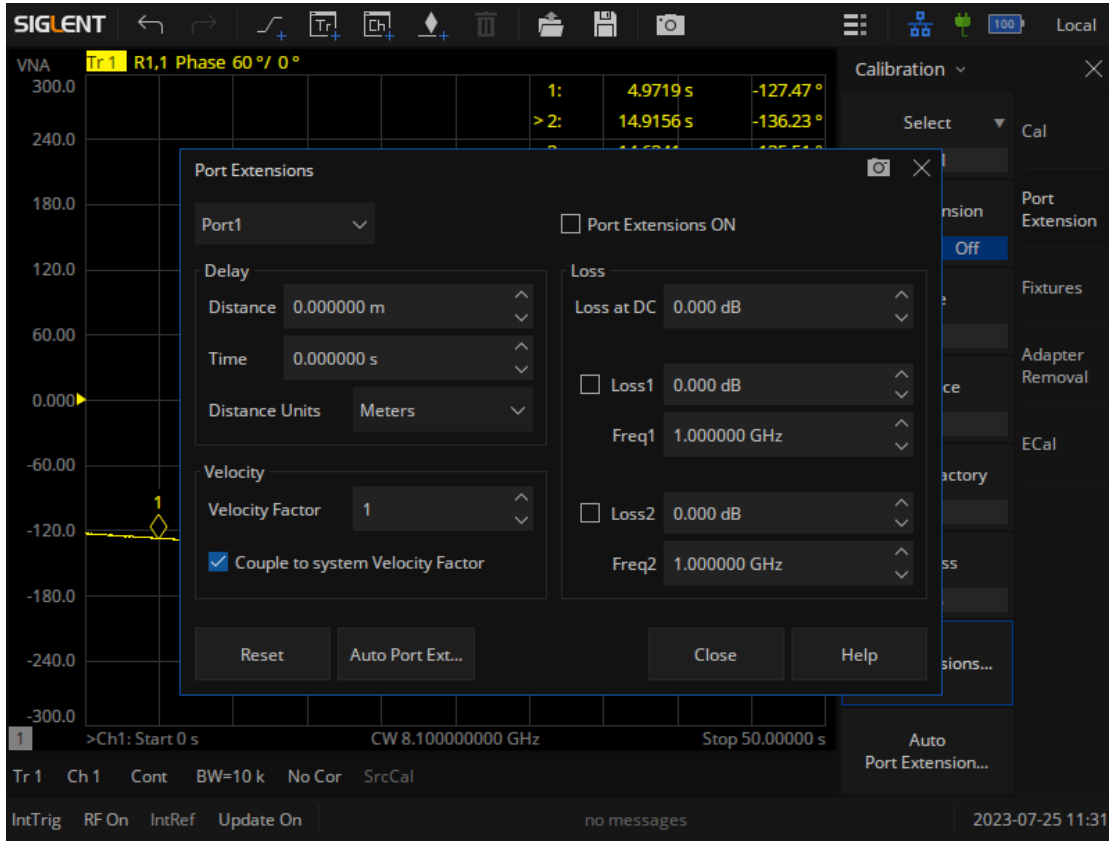


Embedding and De-Embedding:

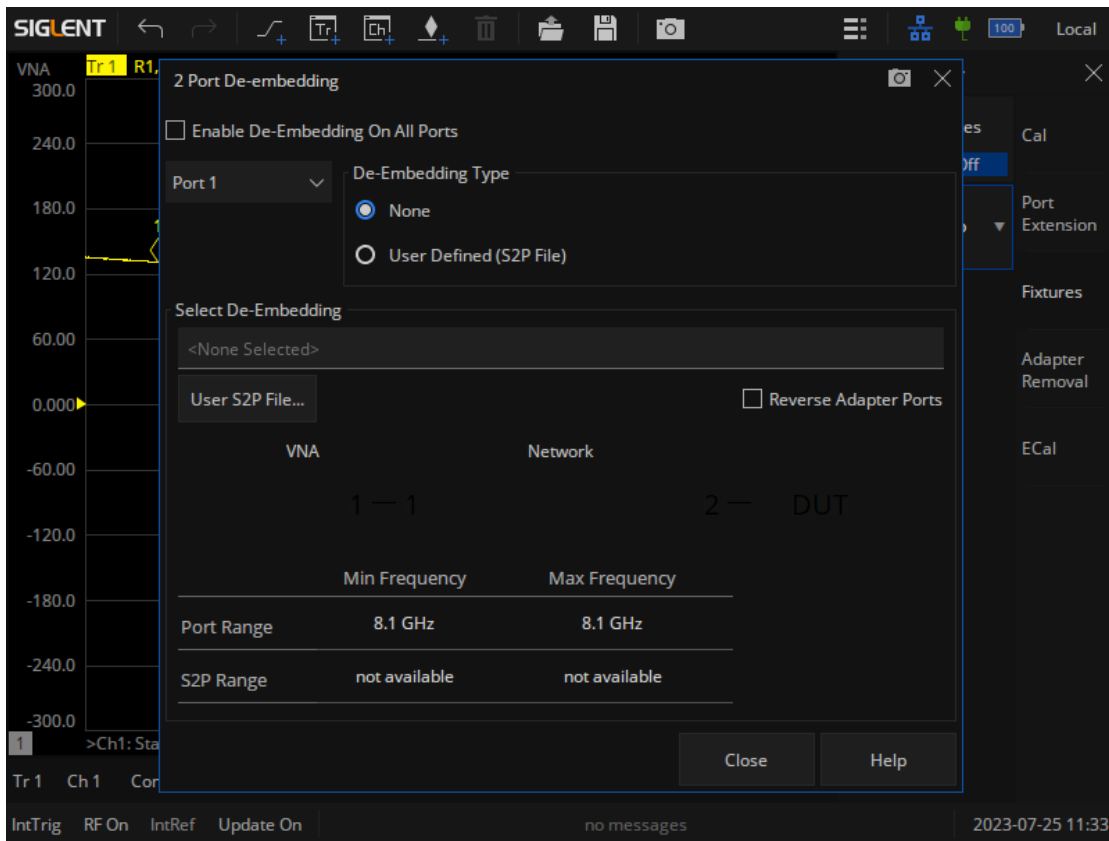


CAT

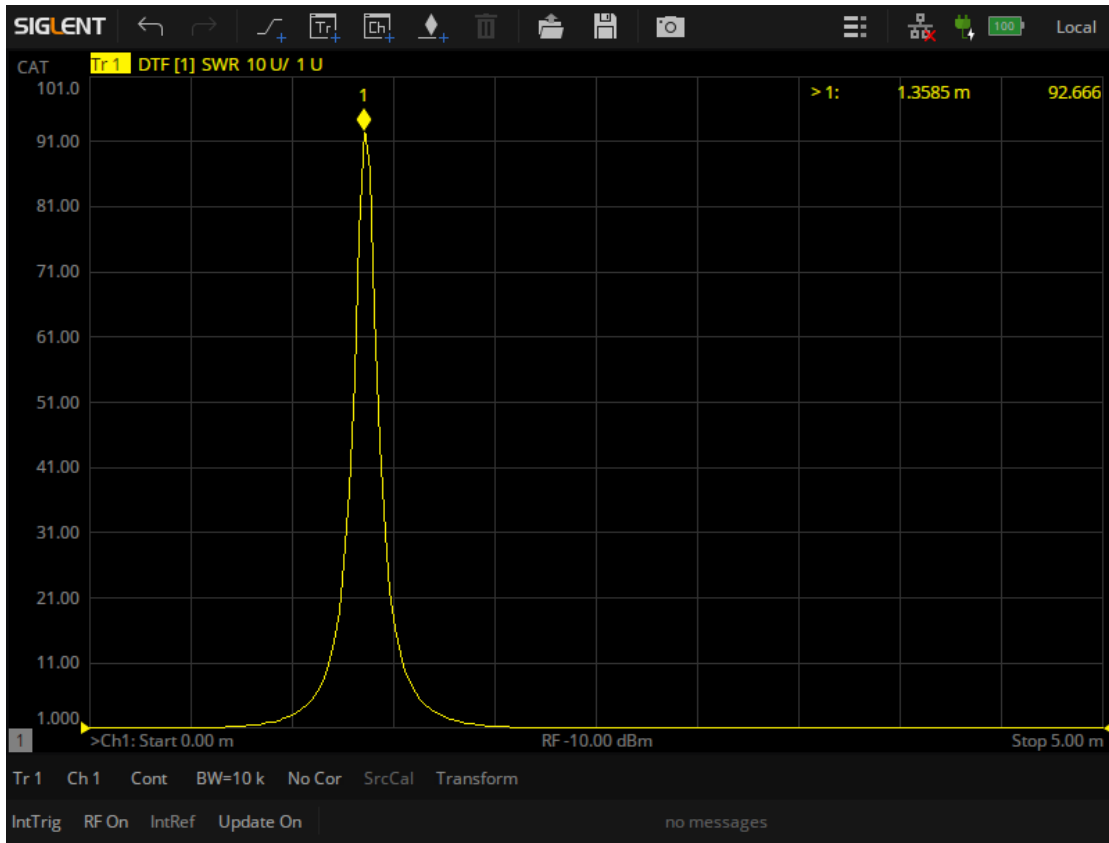


Time-Domain analysis

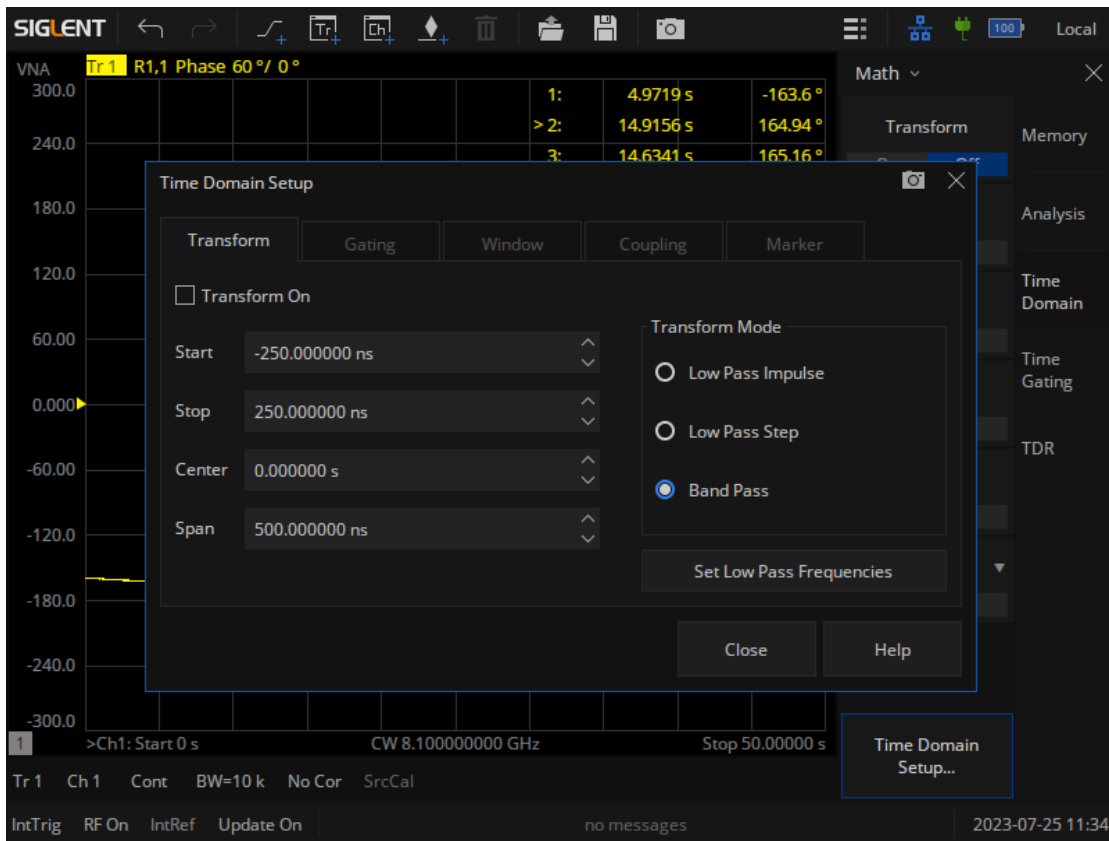

Enhanced Time-Domain analysis(TDR)

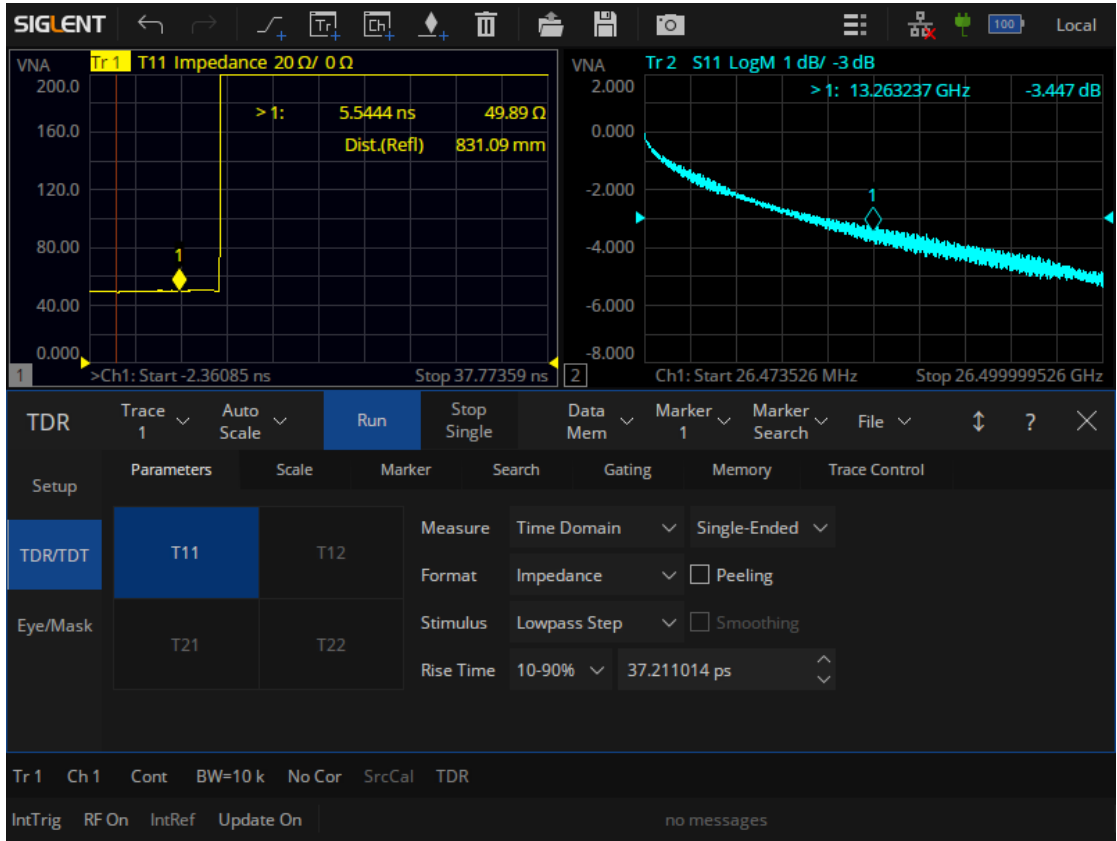

Spectrum analysis

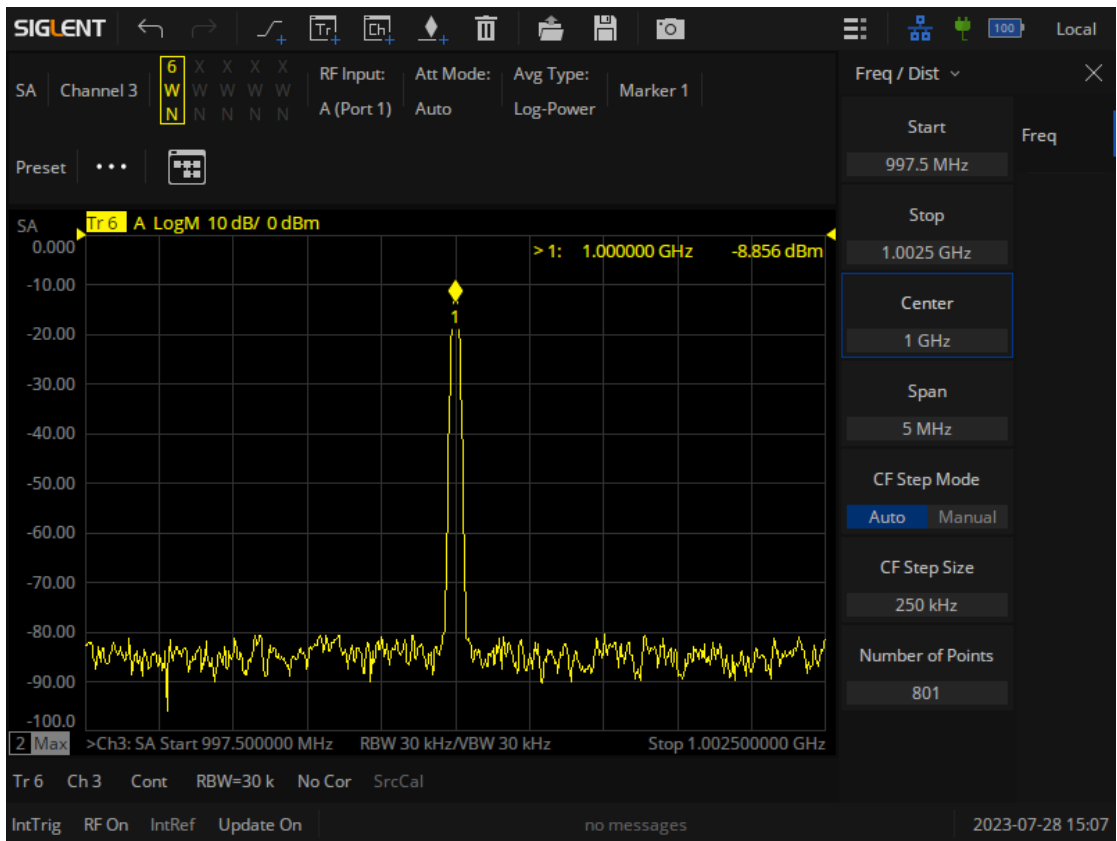

Definitions

Specifications are valid under the following conditions: The instrument is within the calibration period, has been stored between 0 and 40°C for at least 2 hours before use, and has been powered on and warmed up for at least 90 minutes. The specifications include the measurement uncertainty unless otherwise noted.

Specifications: All products are guaranteed to meet published specifications at room temperature (approximately 25°C), unless otherwise noted.

Typical: Performance deemed typical implies that 80 percent of the measurement results will meet the typical published performance with a 95th percentile confidence level at room temperature (approximately 25°C). Typical performance is not warranted and does not include measurement uncertainty.

Nominal: This value indicates the expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ohm connector.

Specifications

Dynamic range


Frequency range	IFBW	Specification(dB)	Typical(dB)
30 kHz - 1 MHz	10Hz	90	100
1 MHz - 6 GHz		100	110
6 GHz - 8 GHz		80	110
8 GHz - 14 GHz		100	105
14 GHz - 24 GHz		100	105
24 GHz - 26.5 GHz		95	100

Corrected system performance with calibration kit


User correction: On, system correction: On; Corrected system performance with Keysight 85052D 3.5mm calibration kit, isolation calibration performed. IFBW is 10 Hz, no averaging applied to data, and environmental temperature is 25°C (\pm 5°C), with $<$ 1°C deviation from calibration temperature.

Specification (dB)	30kHz-3 GHz	3GHz-6 GHz	6GHz-14 GHz	9 GHz-20GHz	14GHz-26.5GHz
Directivity	41	39	37	37	37
Source match	36	30	29	29	29
Load match	41	37	35	35	35
Reflect tracking	\pm 0.004	\pm 0.003	\pm 0.004	\pm 0.004	\pm 0.004
Transmission tracking	\pm 0.06	\pm 0.09	\pm 0.11	\pm 0.11	\pm 0.11

Reflection uncertainty (Specification, Power: -10 dBm, IFBW:10 Hz):

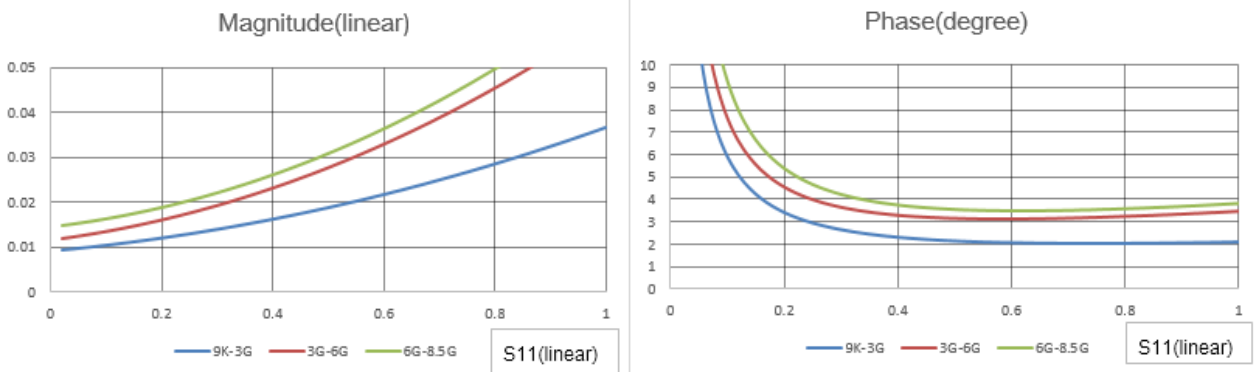

Transmission uncertainty (Specification, Power: -10 dBm, IFBW:10 Hz):

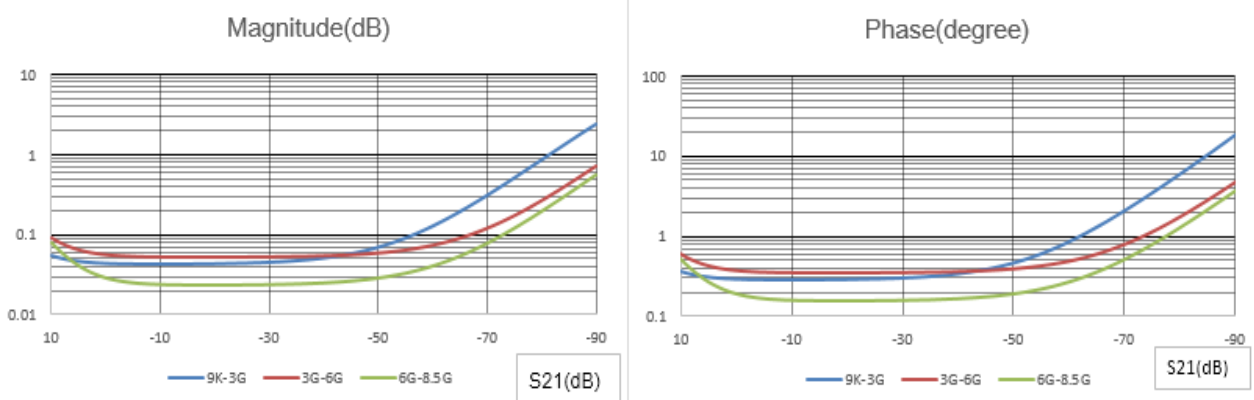

Uncorrected system performance

User correction: Off, system correction: On; IFBW is 10 Hz, no averaging applied to data.

Specification (dB)	30kHz - 300kHz	300kHz - 1 GHz	1GHz-6 GHz	6 GHz-26.5GHz
Directivity	15	15	16	16
Source match	11	16	16	18
Load match	5	5	10	7
Reflect tracking	±1.4	±1.4	±1	±1
Transmission tracking	±1.4	±1.4	±1	±1

Test port output (Source)

Test port output frequency

Description	Specification
Frequency range	
SHN914A	30 kHz to 14 GHz
SHN920A	30 kHz to 20 GHz
SHN926A	30 kHz to 26.5 GHz
Frequency resolution	1 Hz
CW accuracy	
Standard	± 1.0 ppm ($23 \pm 3^\circ\text{C}$)
Source stability	
Standard	± 1.0 ppm (0 to 40°C) ± 0.5 ppm/year, ± 3.0 ppm/20 year

Test port output power

Description	Specification
Preset power	-10 dBm
Level accuracy	± 1.5 dB@-10 dBm 30kHz ~ 20GHz ± 2.5 dB@-10 dBm 20GHz ~ 26.5GHz
Level linearity	
30 kHz - 100 kHz	± 1 dB (-20 dBm to -11 dBm)
100 kHz - 25 MHz	± 1 dB (-20 dBm to 0 dBm)
25 MHz - 20 GHz	± 1 dB (-20 dBm to -1 dBm)
20 GHz - 26.5 GHz	± 2 dB (-20 dBm to -8 dBm)
Range	
30 kHz - 100 kHz	-45 dBm to -11 dBm
100 kHz - 25 MHz	-45 dBm to -5 dBm
25 MHz - 20 GHz	-45 dBm to -1 dBm
20 GHz - 26.5 GHz	-45 dBm to -8 dBm
Sweep range	
30 kHz - 100 kHz	-45 dBm to -11 dBm
100 kHz - 25 MHz	-45 dBm to -5 dBm
25 MHz - 20 GHz	-45 dBm to -1 dBm
20 GHz - 26.5 GHz	-45 dBm to -8 dBm
Max leveled power	
30 kHz - 100 kHz	-11 dBm (Typ.)
100 kHz - 25 MHz	-4 dBm (Typ.)
25 MHz - 100 MHz	0 dBm (Typ.)
100 MHz - 6 GHz	2 dBm (Typ.)

6 GHz - 8 GHz	0 dBm (Typ.)
8 GHz - 14 GHz	2 dBm (Typ.)
14GHz - 20 GHz	0 dBm (Typ.)
20 GHz - 26.5 GHz	-6 dBm (Typ.)
Level resolution	0.05 dB

Test port output signal purity

Description	Specification
2nd or 3rd harmonics (0 dBm)	
100 kHz to 25 MHz	< -10 dBc
25 MHz to 8 GHz	< -10 dBc
9 GHz to 26.5 GHz	< -10 dBc
Non-harmonic spurious (0 dBm)	< -20 dBc

Test port input

Test port input levels

Description	Specification	Typical
Max input level		
30 kHz-14 GHz	+10 dBm	
14 GHz-26.5 GHz	+10 dBm	
Damage input level		
30 kHz-26.5 GHz	+27 dBm (RF) or 35 V (DC)	
Precision		
30 kHz -1 GHz	±1.5 dB@-15 dBm	±0.2 dB@-15 dBm
1 GHz - 20 GHz	±2.0 dB@-15 dBm	±0.2 dB@-15 dBm
20 GHz – 26.5 GHz	±2.5 dB@-15 dBm	±0.5 dB@-15 dBm
Crosstalk		
30 kHz -100 kHz	-95 dB	-105 dB
100 kHz - 6 GHz	-75 dB	-120 dB
6 GHz - 9 GHz	-80 dB	-105 dB
9 GHz - 20 GHz	-95 dB	-105 dB
20 GHz - 26.5 GHz	-60 dB	-70 dB
Noise floor		
30 kHz - 50 kHz	-70 dBm/Hz	-80 dBm/Hz
50 kHz - 200 kHz	-90 dBm/Hz	-110 dBm/Hz
200 kHz - 6.2 GHz	-100 dBm/Hz	-120 dBm/Hz
6.2 GHz – 9 GHz	-90 dBm/Hz	-100 dBm/Hz
9 GHz - 22 GHz	-100 dBm/Hz	-115 dBm/Hz

22 GHz - 26.5 GHz	-80 dBm/Hz	-110 dBm/Hz
Compression level(+10 dBm)		
Magnitude		
30 kHz- 26.5 GHz		1 dB
Phase		
30 kHz- 26.5 GHz		5 deg

Trace noise

Description	Specification	Typical
Note: Setting max output power		
Transmission trace noise magnitude		
30 kHz- 50 kHz (IFBW=30 Hz)	0.003 dB rms	0.0015 dB rms
50 kHz- 1 MHz (IFBW=30 Hz)	0.003 dB rms	0.0015 dB rms
1 MHz- 9 GHz (IFBW=10 kHz)	0.003 dB rms	0.0015 dB rms
9 GHz-14 GHz (IFBW=10 kHz)	0.005 dB rms	0.0025 dB rms
14GHz-26.5 GHz (IFBW=10 kHz)	0.005 dB rms	0.0025 dB rms
Reflection trace noise magnitude		
30 kHz- 50 kHz (IFBW=30 Hz)	0.003 dB rms	0.0005 dB rms
50 kHz- 1 MHz (IFBW=30 Hz)	0.003 dB rms	0.0007 dB rms
1 MHz- 9 GHz (IFBW=10 kHz)	0.003 dB rms	0.0015 dB rms
9 GHz-14 GHz (IFBW=10 kHz)	0.004 dB rms	0.002 dB rms
14GHz-26.5 GHz (IFBW=10 kHz)	0.004 dB rms	0.002 dB rms
Transmission trace noise phase		
30 kHz- 50 kHz (IFBW=30 Hz)	0.03 deg rms	0.015 deg rms
50 kHz- 1 MHz (IFBW=30 Hz)	0.03 deg rms	0.015 deg rms
1 MHz- 9 GHz (IFBW=10 kHz)	0.04 deg rms	0.004 deg rms
9 GHz-14 GHz (IFBW=10 kHz)	0.04 deg rms	0.004 deg rms
14GHz-26.5 GHz (IFBW=10 kHz)	0.06 deg rms	0.006 deg rms
Reflection trace noise phase		
30 kHz- 50 kHz (IFBW=30 Hz)	0.03 deg rms	0.015 deg rms
50 kHz- 1 MHz (IFBW=30 Hz)	0.03 deg rms	0.015 deg rms
1 MHz- 9 GHz (IFBW=10 kHz)	0.04 deg rms	0.004 deg rms
9 GHz-14 GHz (IFBW=10 kHz)	0.04 deg rms	0.004 deg rms
14GHz-26.5 GHz (IFBW=10 kHz)	0.06 deg rms	0.006deg rms

Stability

Description	Specification	Typical
Magnitude		
30 kHz- 9 GHz		± 0.01 dB/°C
9 GHz- 26.5 GHz		± 0.05 dB/°C
Phase		
30 kHz- 9 GHz		± 0.1 deg/°C
9 GHz- 26.5 GHz		± 0.3 deg/°C

Dynamic accuracy

Description	Specification
Relative to -10 dBm input power	
Magnitude	
-10 dBm	± 0.5 dB
-30 dBm	± 0.5 dB
-55 dBm	± 2.5 dB
Phase	
-10 dBm	± 4.5 deg
-30 dBm	± 5 deg
-55 dBm	± 16.5 deg

SA Mode

Description	Specification	Typical
Power Range	-70dBm - +15dBm	
Noise Floor	110 dBm/Hz - 130dBm/Hz	130dBm/Hz
Phase Noise	≤ -98dBc/Hz (1GHz@100kHz)	
Max Input Level Without Damaged	27dBm	
Residual Response	≤ -80dBm	-100dBm

CAT Mode

Description	Specification
DTF	Range: Velocity Factor ×Light Velocity×(Points Number- 1)/BW×2 Resolution: Range/(Points Number- 1)
Return Loss Range(dB)	-6k dB - +6k dB
VSWR Resolution	1m dB - 1k dB
VSWR Range	1.001 - 1G
VSWR Resolution	0.001

Sweep time

Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 500 kHz				
Points	201	401	1601	6401
2-port cal	28 ms	28 ms	75 ms	300 ms
Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 100 kHz.				
Points	201	401	1601	6401
2-port cal	30 ms	30 ms	85 ms	340 ms
Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 10 kHz.				
Points	201	401	1601	6401
2-port cal	60 ms	70 ms	350 ms	1400 ms
Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 1 kHz.				
Points	201	401	1601	6401
2-port cal	300 ms	500 ms	2500 ms	10000 ms
Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 500 kHz.				
Points	201	401	1601	6401
2-port cal	28 ms	28 ms	75 ms	300 ms
Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 100 kHz.				
Points	201	401	1601	6401
2-port cal	30 ms	30 ms	85 ms	340 ms
Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 10 kHz.				
Points	201	401	1601	6401
2-port cal	60 ms	70 ms	350 ms	1400 ms
Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 1 kHz.				
Points	201	401	1601	6401
2-port cal	300 ms	500 ms	2500 ms	10000 ms

General information

Description	Characteristics
Operating environment	
Temperature	0 to 40 °C
Humidity	85%: 40 °C, 24 hours
Altitude	0 to 3000 m
Non-operating storage environment	
Temperature	-20 °C to 70 °C
Humidity	85%: 65 °C, 24 hours
Altitude	0 to 15000 m
Size	W×H×D=310 mm × 215 mm × 78.5 mm
Weight	3.2 kg
EMC	
Conducted disturbance: CISPR 11/EN 55011	CLASS A group 1, 150 kHz - 30 MHz
Radiated disturbance: CISPR 11/EN 55011	CLASS A group 1, 30 MHz -1 GHz
Electrostatic discharge(ESD): IEC61000-4-2/EN61000-4-2	4.0 kV (contact), 8.0 kV (air)
Radio-frequency electromagnetic field Immunity: IEC 61000-4-3/EN 61000-4-3	10 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
Electrical fast transients (EFT): IEC 61000-4-4/EN 61000-4-4	2 kV (AC power ports)
Surges: IEC 61000-4-5/EN 61000-4-5	1 kV (Line to line) ; 2 kV (Line to ground)
Radio-frequency continuous conducted Immunity: IEC 61000-4-6/EN 61000-4-6	3 V, 0.15-80 MHz
Voltage dips and interruptions: IEC 61000-4-11/EN 61000-4-11	Voltage dips: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles; Voltage interruptions: 0% UT during 250 cycles
Safety	
UL 61010-1:2012/R: 2018-11; CAN/CSA-C22.2 No. 61010-1:2012/A1:2018-11. UL 61010-2-030:2018; CAN/CSA-C22.2 No. 61010-2-030:2018.	

Panel information

Top Panel	
RF connectors	3.5mm NMD (male), 50Ω
USB Host	USB-A 2.0
USB Device	USB-C 2.0
LAN	LAN (VXI11), 10/100 Base, RJ-45
GPS Antenna	SMA Female, 3.3V, 50Ω
Bias Out	SMB Female, 12V-32V, step 0.1V
External Trigger Input	1 kΩ, 5V TTL, BNC Female
10M Reference Input	10 MHz, -5 dBm~+10 dBm, BNC Female, 50Ω
Remote control	
Hardware connectors	LAN, USB-TMC, GPIB (USB-GPIB adaptor)
Remote control interfaces	SCPI/ Labview/ IVI based on USB-TMC/ VXI-11/ GPIB/ Socket/Telnet NI-MAX Web Browser (HTML 5 Supported)

Ordering Information

Items	Description	Order number
Products	2 ports, 14G Vector Network Analyzer	SHN914A
	2 ports, 20G Vector Network Analyzer	SHN920A
	2 ports, 26.5G Vector Network Analyzer	SHN926A
standard fittings	Quick Start, USB Type C Line, Rechargeable lithium battery, AC-DC adapter, Portable bag	
TDA Option	Time Domain Analysis	SHN900-TDA
TDR Option	Enhanced Time Domain Analysis	SHN900-TDR
SA Option	Spectrum analysis	SHN900-SA
3.5mm, Male, 50Ω Calibration Kit, 0-4.5GHz		F603ME
3.5mm, Female, 50Ω Calibration Kit, 0-4.5GHz		F603FE
3.5mm, Male, 50Ω Calibration Kit, 0-9GHz		F604MS
3.5mm, Female, 50Ω Calibration Kit, 0-9GHz		F604FS
3.5mm, Male and Female, 50Ω Calibration Kit, 0-9GHz		F604TS
3.5mm, Male and Female, 50Ω Calibration Kit, 0-26.5GHz		F606TS
Electronic Calibration Kit		SEM5000A
RF Test Demo Board		SNA-TB01
Adjustable Differential TDR probe DC-18 GHz		ADP-18
Adjustable Differential TDR probe DC-26.5 GHz		ADP-26
Adjustable Differential TDR probe DC-18 GHz		ASP-18
Adjustable Differential TDR probe DC-26.5 GHz		ASP-26
SMA(M)-SMA(M) cable DC-18 GHz, 1000 mm		SMA-SMA-18L
SMA(M)-SMA(M) cable DC-26.5 GHz, 1000 mm		SMA-SMA-26L
SMA(F)-SMA(M) cable DC-26.5 GHz, 1000 mm		SMAF-SMA-26L
NMD 3.5 female-NMD 3.5 Male DC-26.5 GHz, 635 mm		V26-N35MN35F-25IN
NMD 3.5 female-APC 3.5 female DC-26.5 GHz, 635 mm		V26-N35FA35F-25IN
USB-GPIB Adaptor		USB-GPIB
GPS antenna, SMA(M), 1000 mm		ANT-GPS1